



# 德威特

门窗耐候密封条

Weather seals

*for windows and doors*

**DEVENTER**

DAS DICHTPROFIL.

# Plastic Window Profiles

Our weather seals made of foamed or compact TPE as well as NBR PVC are suitable for all profile systems. The profiles are highly functional with excellent resilience. A wide range of colours and excellent processing is offered.

We offer individual solutions with gliding foil to optimize installation. High friction shown here are a selection of profiles out of our stock. Further profiles are deliverable on request.

# 塑料窗体密封条

我们的耐候密封条，采用质地坚实或者发泡的TPE材料以及NBR PVC为材料作为密封型材，适合各类型材系统。型材具有功能性强、弹性出色、色彩丰富、加工性能优异等特点。

我们提供的个性化方案配合滑动覆层可有效改善安装方式。材料成分拥有高摩擦阻力，确保了材料的尺寸配合和抗延展性，防止材料发生回缩和延展。

公司目前库存型材列示如下：其他型材可根据需求提供。



## SP 6919a

Outside glazing seal fits to VEKA system  
外玻璃密封条，外槽口密封条，  
适合VEKA系统



## SP 6920a

Inside glazing seal fits to VEKA system  
内槽口密封条，适合VEKA系统




## SP 7685

Outside glazing seal fits to KBE system  
外玻璃密封条，外槽口密封条，  
适合KBE系统



## SP 7686

Inside glazing seal fits to KBE system  
内槽口密封条，适合KBE系统

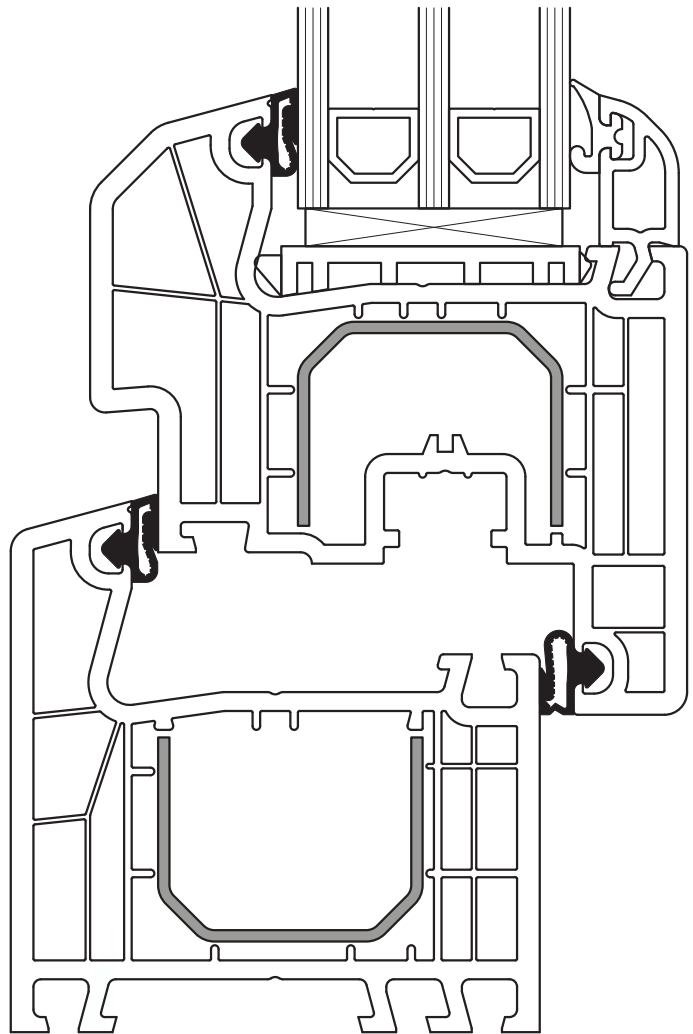

# Wood-Aluminium Window Profiles

We have a wide range of weather seals for European wood aluminium windows with different standards and excellent function and processing characteristics.

The combination of new profile designs and excellent material guaranties reliable thermal and acoustic properties.

The profiles shown here are a selection of profiles out of our stock. Further profiles are deliverable on request.

## 木铝窗密封条

该系列密封型材能够满足各类欧洲木铝窗体系统要求，以其出色的功能性和通用的加工性而备受推崇。

新型材与高品质材料的组合为保温与隔音提供了可靠保障。

公司目前库存型材列示如下：其他型材可根据需求提供。

### DS 7354



Outside glazing seal for 3.5–5 mm working range  
外玻璃密封条，  
适用于 3.5–5 mm 槽口

### S 7634



Inside glazing seal for 4 mm fixed space  
内玻璃密封条，  
适用于 4 mm 槽口

### S 6647



Outside seal for 1 mm range  
外槽口密封条，  
适用于 1 mm 槽口

### SP 7603




Sash rebate and overlap seal for 12 mm rebate height, 5–6 mm working range and 3 x 5 mm groove  
平开形外槽口与内槽口密封条，  
适用于 12 mm 企口槽高度、  
5–6 mm 槽口和 3 x 5 mm 榫槽

### S 7650



allround seal for various wood aluminium systems  
各类木铝材结构的通用密封条

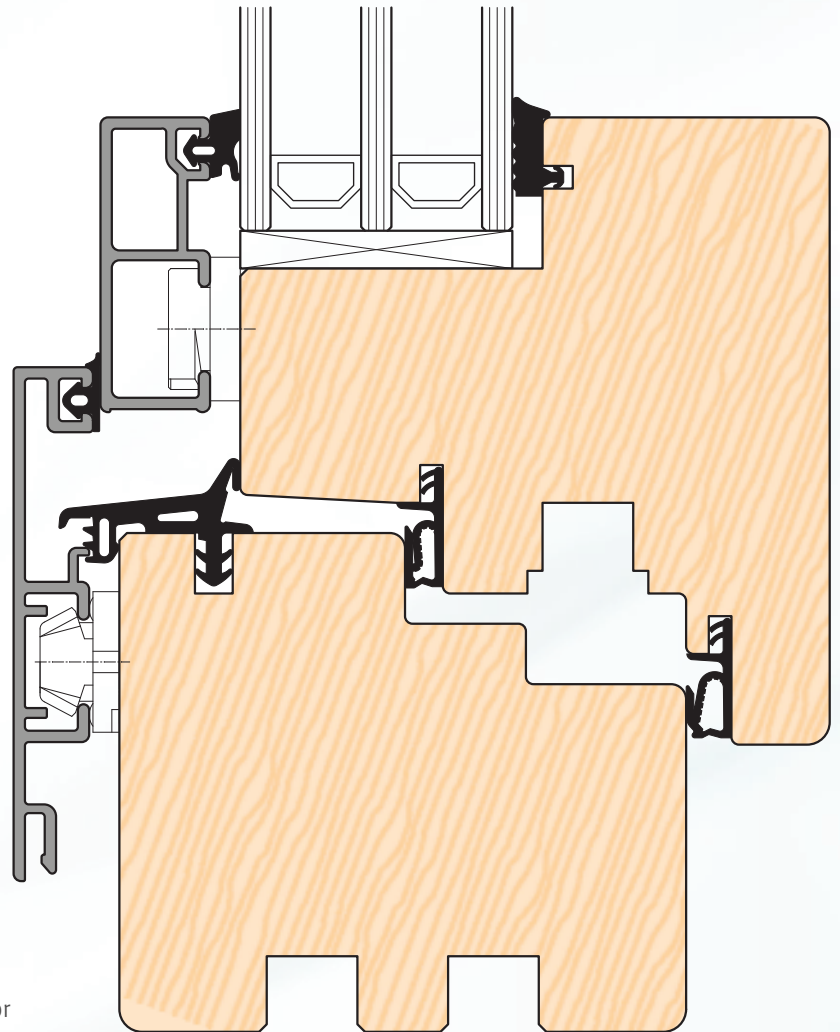

# Weather Seals for Wood Windows

A wide range of weather seals with various standards for European window manufacturers assures every window manufacturer the right solution.

# 木窗耐候密封条

密封型材样式各异、款型丰富，针对欧洲不同窗体结构要求而设计，为每一家窗体制造商提供合格、完美的解决方案。

新一代采用高品质TPE泡沫材料的密封型材，为您窗体系统的隔热、隔音提供了可靠保障。公司目前库存型材列示如下：其他型材可根据需求提供。



## S 7375 K

Inside glazing seal self adhesive for 4 mm working range

内侧自粘玻璃密封条，适用于 4 mm 槽口



## S 6867

For sealing the gap between glazing beads and frame for 4x4 mm groove

用于覆盖玻璃条下方的间隙，适用于 4x4 mm 榫槽



## S 6647

Outside seal for 1 mm range  
外槽口密封条，适用于 1 mm 槽口



## SP 7612

Sash rebate seal for 12 mm rebate height, 5 mm working range and 4-5x8 mm groove


平开形外槽口密封条，适用于 12 mm 企口槽高度、5 mm 槽口和 4-5x8 mm 榫槽



## SP 7610

Overlap seal for 10 mm rebate height 6mm working range and 3x5 mm groove

平开形内槽口密封条，适用于 10 mm 企口槽高度、6 mm 槽口和 3x5 mm 榫槽

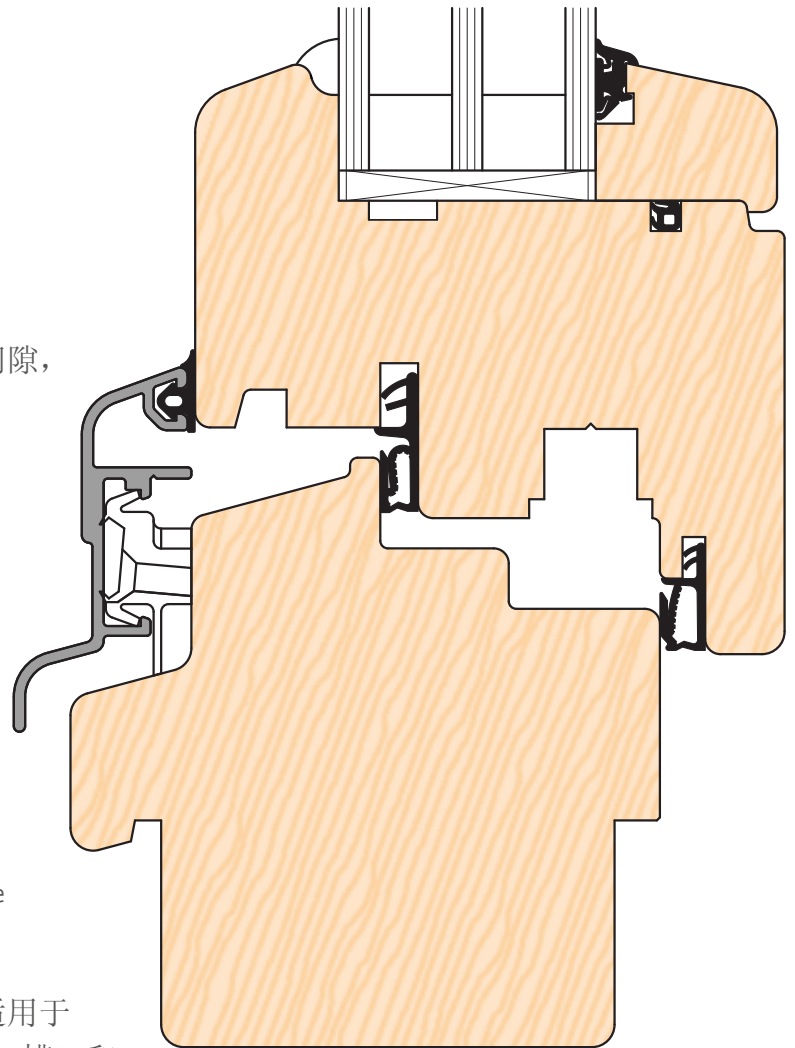

# Weather Seals for Interior Doors

Outstanding from standard damping profiles on the market by special functions. Our weather seals have an outstanding soft and comfortable closing behaviour. Deventer weather seals are suitable for door constructions with convenient and unfavourable swivel point.

We have excellent sound insulation properties up to 52 dB and are best suitable for industrial mechanical installation.

The profiles shown here are a selection of profiles out of our stock. Further profiles are deliverable on request.

# 室内门耐候密封条

相对于常规标准的隔音型材，其性能更为卓越。我们的密封型材锁合性能独特、柔软、舒适。DEVENTER 密封条适合于直角结构和平开结构的门体结构。

该密封条不仅拥有出色的隔音性能，还可将噪音降低至 52 dB，尤为适合工业加工。公司目前库存型材列示如下：其他型材可根据需求提供。



## S 6513

Sash rebate and overlap seal for convenient swivel point  
直角结构平开形外密封条  
和平开形内密封条



## SP 7522

Interior door seal for convenient swivel point  
直角结构室内门密封条





## SP 7677

Interior door seal for convenient and unfavourable swivel point  
直角结构和平开结构的室内门密封条



## S 6577a

Interior door seal for convenient and unfavourable swivel point  
直角结构和平开结构的室内门密封条

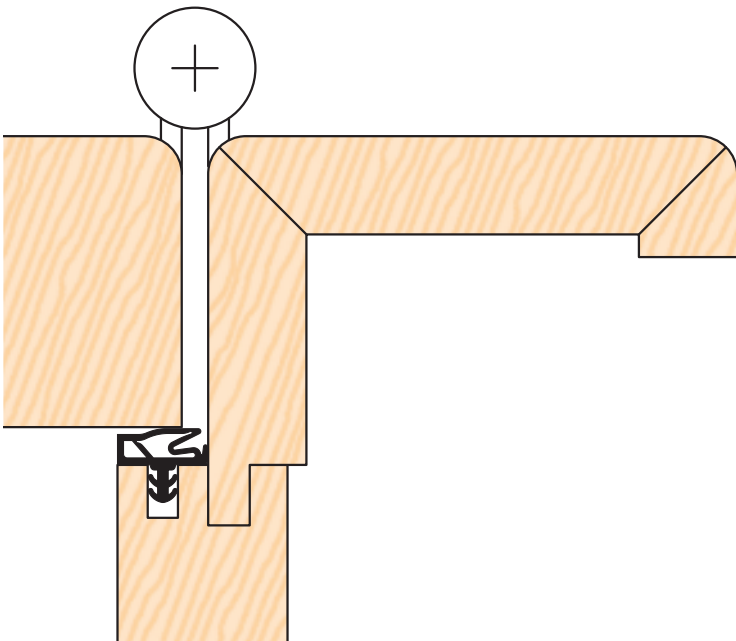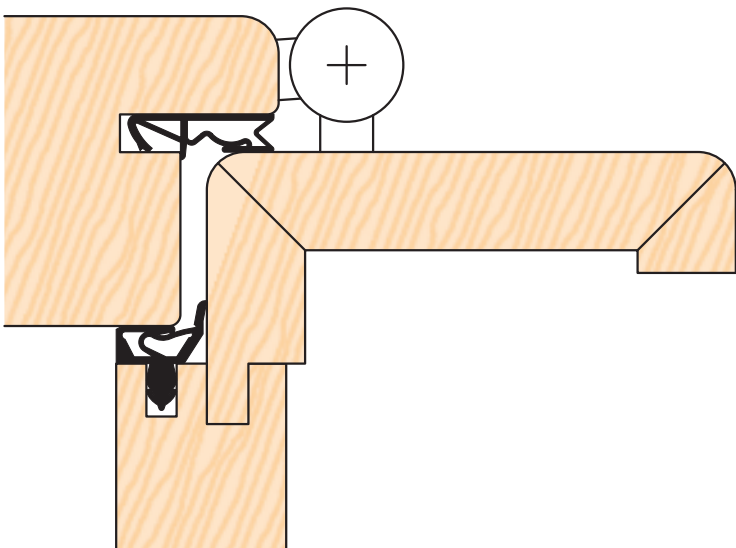



# Weather Seals for Exterior Doors

Considering varying climates extritorial doors are extremely stressed (e.g. inside warm – outside cold, inside dry – outside wet).

Deventer seals out of TPE foam or silicone, bridges the highest tolerances of warped doors and can cope convenient and unfavourable swivel points.

The profiles shown here are a selection of profiles out of our stock. Further profiles are deliverable on request.

# 室外门耐候密封条

由于气候环境的变幻无常—内层干热、外层湿冷—室外门常遭受极端负荷影响。

DEVENTER 的 TPE 泡沫材料和硅胶密封条确保了门扇发生翘曲时最大限度的公差补偿，并且非常适合直角和平开式门体结构。

公司目前库存型材列示如下：其他型材可根据需求提供。



## SP 7715

Exterior door seal for convenient and unfavourable swivel point  
15 mm rebate height

直角结构和平开结构的房门密封条，槽口高度 15 mm



## DS 185a

Exterior door seal for convenient swivel point 18 mm rebate height

直角结构房门密封条，槽口高度 18 mm



## DS 6988a

Exterior door seal for convenient and unfavourable swivel point  
18 mm rebate height


直角结构和平开结构的房门密封条，槽口高度 18 mm



## DS 12-18c

Exterior door seal for convenient swivel point 12-18 mm rebate height

直角结构房门密封条，槽口高度 12-18 mm

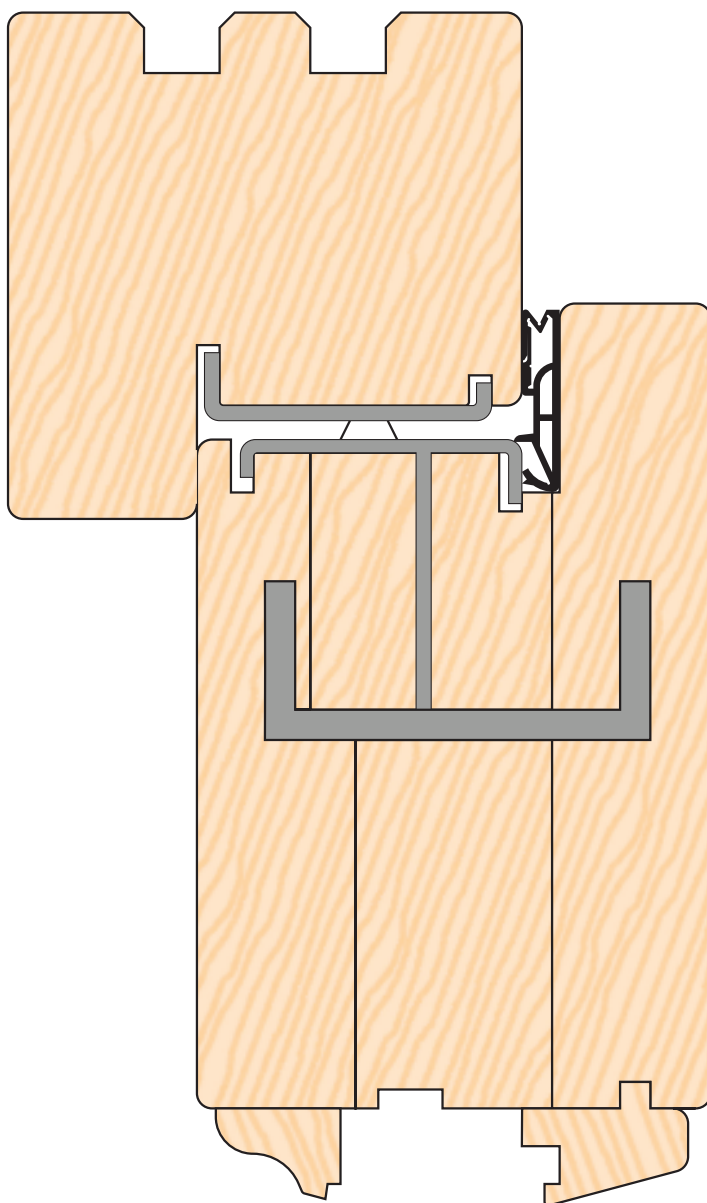

# Automatic Door Seals

Deventer automatic door seals used in public and private buildings with high demand in sound insulation, smoke and fire protection, for example schools, hospitals, hotels, administration and office buildings.


Automatic door seals are the perfect complement in combination with the three sided Deventer functional interior and exterior door seals.

The automatic door seals shown here are a selection of seals out of our stock. Further profiles are deliverable on request.

## DBS 1230

Self-regulating automatic door seal  
12 x 30 mm groove, max 14 mm working range


贴地门封条，可自动调整，  
12x30 mm 榫槽，  
最大离地间隙 14 mm

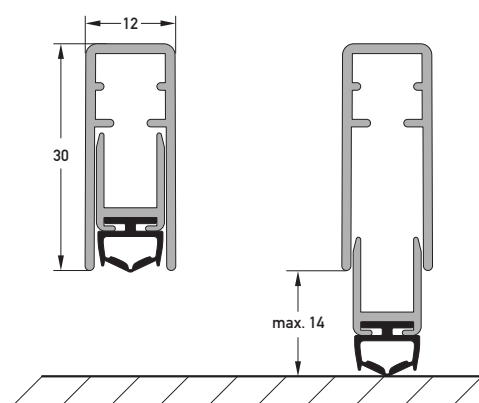

## DSD 1530

Automatic door seal sound insulation  
15 x 30 mm groove, max 20 mm working range


贴地门密封条，隔音，  
15x30 mm 榫槽，  
最大离地间隙 20 mm

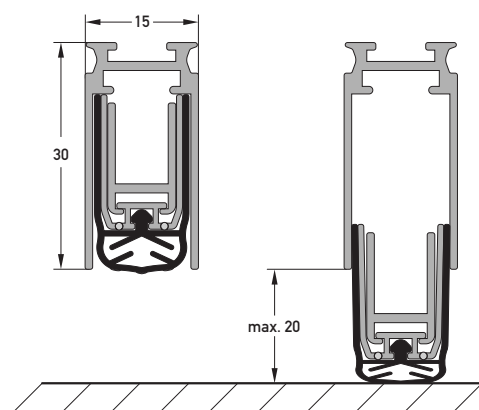

## DRS 1540 G

Automatic door seal for glass doors and to upgrade wooden doors, self-adhesive, max 14 mm working range

全玻璃贴地门密封条，  
可后配木门，自粘型，  
最大离地间隙 14 mm

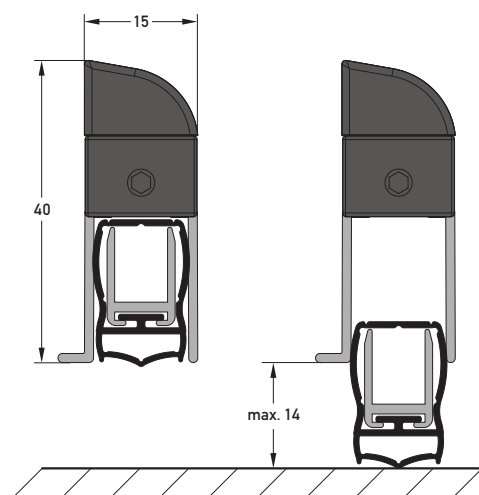

# 贴地门密封条

Deventer 贴地门密封条适用于各类对隔音、隔烟及防火有着较高要求的公共和私人建筑。包括学校、医院、酒店、管理机构和办公场所。贴地门密封条是对 Deventer 室内门、室外门三面环绕型功能密封条的完美补充。公司目前库存型材列示如下：其他型材可根据需求提供。

